

# SRX for easy attachment / detachment




### BENEFIT

- Easy installation
- Can be used in places where replacement is frequently required
- Simple design that is easy to use anywhere


### APPLICATIONS

- Replacing signboard parts
- Removable store display

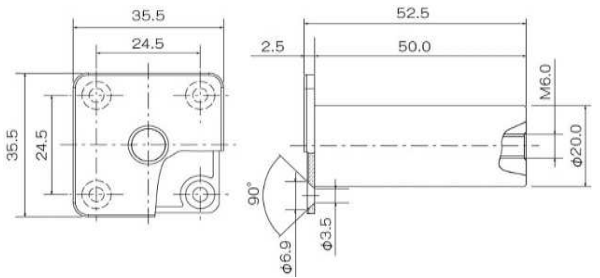

Code	Part No.	Allowable load [N]			Durability [Cycle]	Operation Temperature [°C] (°F)
		「A」 Direction	「B」 Direction	「C」 Direction		
381001	SRX-01	100	50	50	50,000	-10 to 50 (14 to 122°F)

### ALLOWABLE LOAD

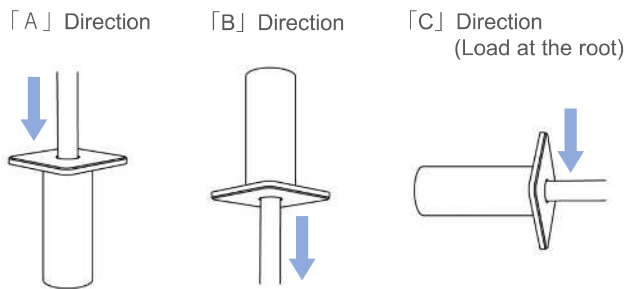

### DURABILITY TEST CONDITION

Cycle	1 attach and detach / cycle
Load	Allowable load

### MAIN MATERIAL


Part name	Material
Housing	Zinc Die Casting
Cap	Plastics
Cover	Plastics

### CONSTITUTION




### SHAFT SIZE

Dimensions of detachable shaft component

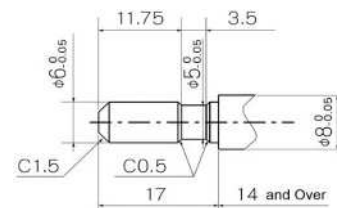

\* Please prepare the shaft at your end, but TOK can also provide, if convenient for you.

### HOW TO USE

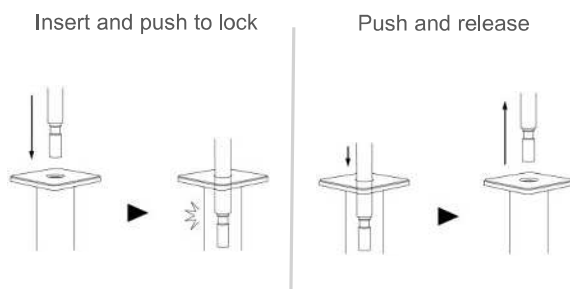

### MOUNTING



### TOK, Inc.

HEAD OFFICE, TOKYO, JAPAN  
 TEL : 81-3-3969-1584  
 EMAIL : en-contact@tok-inc.com  
 URL : www.tok-inc.com/en

### CAD Data Download

Product  
<https://bit.ly/2UO54d5>



### Optional Shaft

<https://bit.ly/2V0yPZP>

