

**LIGHTING-BOLLARD 266 LED**

Steel | 900 mm

**Specifications**

Square steel bollard with a flat top and a vertical LED light strip (650 mm) on two opposite sides. Each with 2 LED strips, Perspex (PMMA) diffuser, operated using 24 V low voltage, 2 m connector cable with plug socket at the base of the bollard. Protection type IP 67.

**Mounting**

Available only with 3p-Technology

**Finish**

- Steel ST37, galvanised with powder coating in standard RAL colours or DB 703
- The height can be adjusted individually (surcharge or discount)

**Technical information**



- Light unit: 2 LED strip (650 mm)
- Power supply: 24 Volt DC
- Power input (max.): approx. 19 W
- Luminous flux (max.): approx. 1170 lm
- Reflected beam angle: 120°
- Light colour: RGB + 4000 K
- Protection type: IP 67

**Note**

The ground rosette is part of the delivery (3p-Technology)

Completely covers the ground shell

Material: ST37 steel, hot-dip galvanised and powder-coated in bollard paint

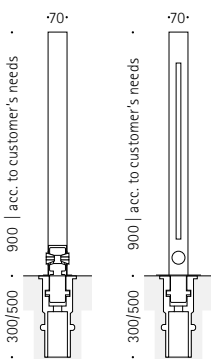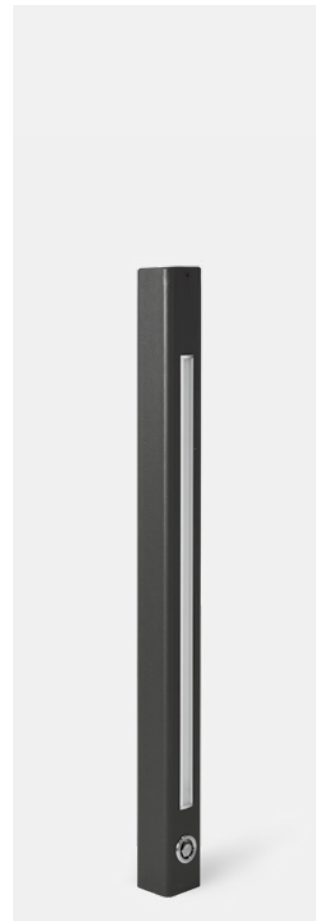

3p-Technology

**Leuchtpoller 266 LED** RGB + white (4000 K)**266.120**

ST



LED



2018

3p-Technologie