




α FCP22AC

Standard dimensions

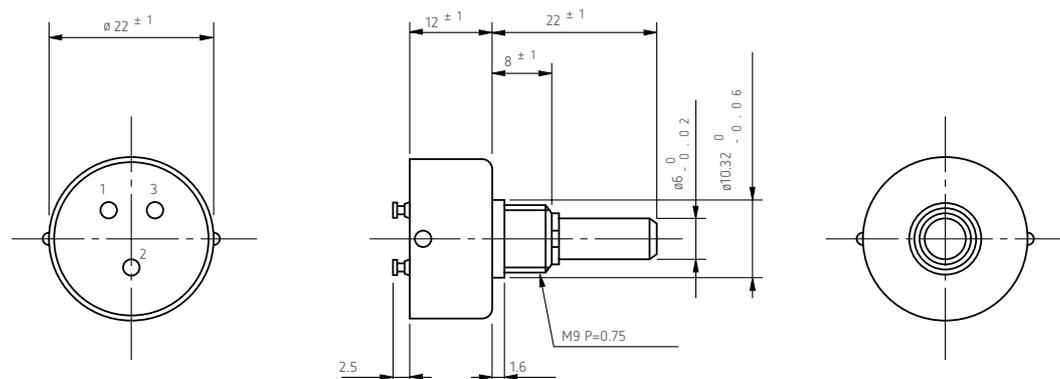

Model FCP22AC
(Metal Housing)

- Note:**
- 1pc. Each inner teeth washer and hex nut are attached.
 - Please process the mounting hole on the panel to be mounted with this potentiometer by the diameter of 10.32mm

General Specifications

Standard Resistance

Values: 1k, 2k, 5k, 10 k (Ω)

Special Practical Resistance Values: 500, 20k, 50k, 100k (Ω)

Total Resistance Tolerance: Standard Class $\pm 15\%$ (L)
Precision Class $\pm 10\%$ (K)

Independent Linearity

Tolerance: Standard Class $\pm 1.5\%$
Precision Class $\pm 1.0\%$

Resolution: Essentially infinite

Output Smoothness: Within 0.1% against input voltage

Contact Resistance

Variation: Within 2% C.R.V.

Power Rating: 1.0W

Electrical Travel: $320^\circ \pm 5^\circ$

Mechanical Travel: 360° (Endless)

Insulation Resistance: Over 1,000M Ω at 500 V.D.C

Dielectric Strength: 1 minute at 500 V.A.C.

Starting Torque: Within 5mN·m (50gf·cm)

Resistance Temperature Coefficient: ± 400 p.p.m./ $^\circ\text{C}$

Mass: Approx. 30g

Special Specifications Available

Extra taps (available up to 1 tap), shaft with front and rear extension (rear shaft with 3mm dia. and 20mm length), with stopper (rotating angle becomes 320° and stopper strength is 0.9N·m [9kgf·cm]), special electrical travel, shaft dia. ($\varnothing 6.35$ mm) bushing with inch dimensions, special machining on the shaft.