


Rubber coated systems


Magnet assembly of NdFeB, rubber coat white, with internal thread, rectangular



A43x31A-KwM4

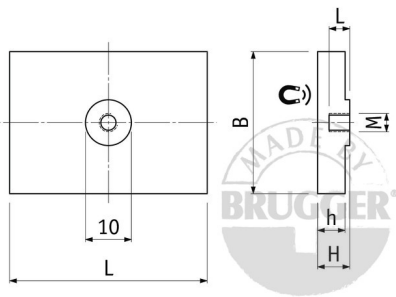

A43x31A-Kw2GBM4

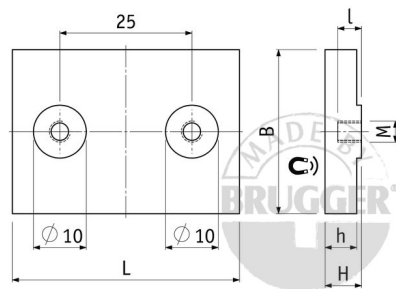

Article number	L mm	B mm	H mm	h mm	Thread MxL	Force* N	Shear force* N	Weight g	Temperature °C
A43x31A-KwM4	43	31	6.9	6	M4x4.5	105	33	27	60
A43x31A-Kw2GBM4	43	31	6.9	6	M4x4.5	146	52	28	60

PRODUCT INFORMATION:
These systems are used especially on delicate surfaces. Due to the rubber coating occur neither scratches nor discoloration. Moreover the slip resistance is improved thanks to rubber coating.

- Alternative to the standard we also offer individual solutions:
- » Other colours rubber coating
 - » Rubber coating harder or softer
 - » Printable rubber coat



REACH



RoHS



PAC free

* The forces have been determined at room temperature on a plate in polished steel (S235JR according to DIN 10 025) with a thickness of 10 mm (1kg ~ 10N). A maximum deviation of -10% compared to the specified value is possible in exceptional cases. Value is exceeded in general. Depending on the type of application (installation situation, temperatures, counter anchor etc.) the forces can be influenced enormously. The indicated values are serving as an orientation. Please get advice and help from our experts.