





# Options



> Touch screen console




> Other rejection systems (rotating blade)

Option	Characteristics	Ref.
Touch screen console	TFT 15".	Contact us
Rejection by 1 pneumatic piston (for model CW-4200/400)	1 rejection L600 x W280 mm conveyor with 1 pneumatic piston.* For products of up to L200 x W280 mm and up to 6 kg (in dynamic weighing). Performance**: 80 packages/minute (with products of up to L200 mm and 2 kg). In MID conditions (M). For models CW-4200/350 and CW-4200/600, contact us.	Contact us
Rejection by 2 pneumatic pistons (for model CW-4200/400)	1 rejection L1,000 x W280 mm conveyor with 2 pneumatic pistons.* For products of up to L200 x W280 mm and up to 6 kg (in dynamic weighing). Performance**: 80 packages/minute (with products of up to L200 mm and 2 kg). In MID conditions (M). For models CW-4200/350 and CW-4200/600, contact us.	Contact us
Other rejection systems (by "Air-jet", rotating blade or folding conveyor)	Depending on the type of product/packaging, required speed, collection system, etc., a rejection system other than the piston type may be required.	Contact us
L350 x W200 mm separation conveyor	For model CW-4200/350.	Contact us
L400 x W280 mm separation conveyor	For model CW-4200/400.	Contact us
L600 x W280 mm conveyor (to replace L400 x W280 mm conveyor)	For model CW-4200/400.	Contact us
L800 x W280 mm conveyor (to replace L400 x W280 mm conveyor)	For model CW-4200/400.	Contact us
L800 x W280 mm weighing conveyor 4 load cells, not MID (to replace L400 x W280 mm conveyor)	For model CW-4200/400.	Contact us
L600 x W400 mm separation conveyor	For model CW-4200/600.	Contact us
L400 x W400 mm conveyor (to replace L600 x W400 mm conveyor)	For model CW-4200/600.	Contact us
L800 x W400 mm conveyor (to replace L600 x W400 mm conveyor)	For model CW-4200/600.	Contact us
L800 x W400 mm weighing conveyor 4 load cells, not MID (to replace L600 x W400 mm conveyor)	For model CW-4200/600.	Contact us



> Other rejection systems ("Air-jet®")

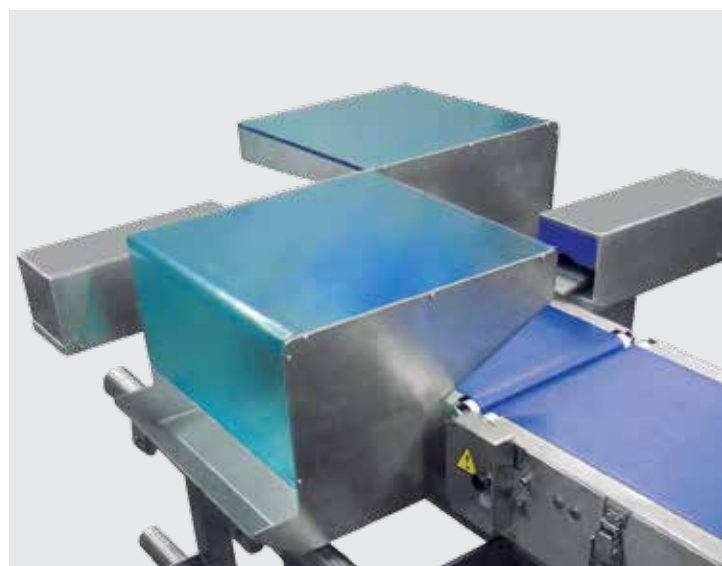

> Container for rejects

<b>Split belt</b>	For transparent packs or irregular shape/cylindrical products.	Contact us
<b>Vertical detector on arch</b>	For transparent packs or irregular shape products. Infeed conveyor with split belt necessary.	Contact us
<b>Container for rejects</b>	Consult us.	Contact us
<b>Right to left operation</b>	Standard operation: from left to right.	Contact us
<b>IP65 protection kit</b>	Protected engines, bearings with lock, packaging gland, special load cell and heated detector.	Contact us
<b>RMS Software</b>	Equipment configuration, production data management and back up (LBS). (See section on software)	7340R1U3 7340RNU3
<b>DCS Software</b>	Production data management. (See section on software)	7340C0U3 7340CNU3
<b>Wi-Fi</b>	Wireless communications.	Contact us
<b>Packed in phytosanitary wood case</b>	Necessary depending on the destination.	PEEC080F
<b>Metrological verification (M)</b>	According to EU weighing directives (MID).	Contact us

\* All the rejection systems (pneumatic piston, "Air-jet®", etc.) depend on the type of product/packaging, required speed, collection system, etc.; please always check with Dibal.

\*\* Maximum performance will depend on the size, weight and morphology of the product, as well as on the regularity of the infeed of the products, the rejection system installed and MID conditions (M).

# Accessories



Ref: Contact us

## Motorised conveyor

Infeed/output L1,000 x W280 mm conveyor, with smooth belt.



Ref: Contact us

## Dibal Vision artificial vision camera

Contact us about applications.



Ref: Contact us

## Barcode readers

Contact us about applications.



Ref: Contact us

## Rollers conveyor


Rollers conveyor for transporting or accumulating products.



Ref: Contact us

## Rotating table

To collect wrapped and/or labelled products.

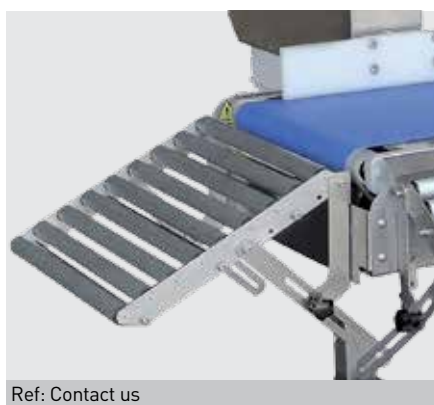

Ref: Contact us

## W200 mm exit ramp

Non-motorised PVC rollers for W200 mm conveyors.



Ref: Contact us

## W280 mm exit ramp

Non-motorised PVC rollers for W280 mm conveyors.



Ref: Contact us

## W400 mm exit ramp

Non-motorised PVC rollers for W400 mm conveyors.



Ref: Contact us

### Exit ramp for rejected products



Ref: Contact us

### Product guiding system in infeed conveyor (standard)

For special guides, contact us.



Ref: Contact us

### Product turning device

To change the position or orientation of the products.



Ref: Contact us

### Polycarbonate protector for weighing conveyor

To avoid external disturbances during the weighing process.



Ref: Contact us

### 4 wheels with brakes

Stud included.



Ref: Contact us

### 24V visual and audible alarm