

MicroSENS Hightemp IR carbonedioxide sensor

Micro-Hybrid gas sensor for reliable and accurate CO₂ measurement in incubators




This IR CO₂ sensor has been specially optimized for the measurement of 5 Vol-% CO₂ in cell incubators to manage ideal cell and tissue growth.

The sensor can be placed directly in the incubation chamber to measure the exact cell experienced environment. It determines the CO₂ concentration based on its characteristic infrared absorption.

ADVANTAGES

- IR dual beam technology
- Temperature and pressure compensated
- Heat-sterilizable up to 190° C
- Long lifetime
- Humidity correction

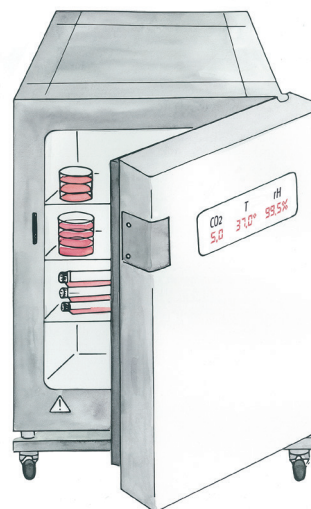

Visit us at www.micro-hybrid.de or call us at +49 36601 5920

All rights reserved. All specifications – technical included – are subject to change without notice. No liability is accepted for any consequential losses, injury or damage resulting from the use of this document or from any omissions or errors herein.

Technical specification

General	
Measuring gas	CO ₂
Measurement range	0 – 20 Vol.-%
Gas supply	Diffusion
Warm up time	< 1 minute (start-up) < 15 minutes (full spec)

Measurement	
Accuracy ¹	± 0,2 Vol.-% ± 2 % of reading
Response time (t ₉₀)	≤ 30 s
Digital resolution	0,001 Vol.-%
Temperature dependence ²	≤ ± 0,1 Vol.-%
Pressure dependence ³	≤ ± 0,05 Vol.-%
Long term stability ⁴	≤ ± 0,2 Vol.-% at 5 Vol.-% / year
Humidity correction	0 ... 200 hPa H ₂ O

Electrical	
Supply voltage	12 – 24 V _{DC}
Power consumption	< 2 W
Digital output	RS232, Micro-Hybrid industrial protocol
Analogue output	4 – 20 mA

Climatic conditions	
Operating temperature	0° C ... 60° C
Humidity	190° C
Storage temperature	< 100 % relative humidity (rH), not condensing
Maximum temperature for heat sterilization (only sensor) ⁵	-25° C ... 85° C

¹ at 37° C, 1013 hPa, dry test gas, excludes calibration gas tolerance of ± 1 %

² with compensation at 1 Vol.% ... 20 Vol.% CO₂ and 20° C ... 60° C, 1013 hPa

³ with compensation at 600 – 1200 hPa, 37° C and 5 Vol.-% CO₂

⁴ stability at 37° C, without heat sterilization

⁵ maximum humidity ≤ 1 % rH, ≥ 85° C auto standby – no CO₂ measurement

Micro-Hybrid-Shop

Micro-Hybrid products available at www.micro-hybrid.de/shop. Filter products simply by selecting the desired properties and request your quotation.