


# Full extension Series 070

- Load capacity up to 200 kg
- Hold-in detent

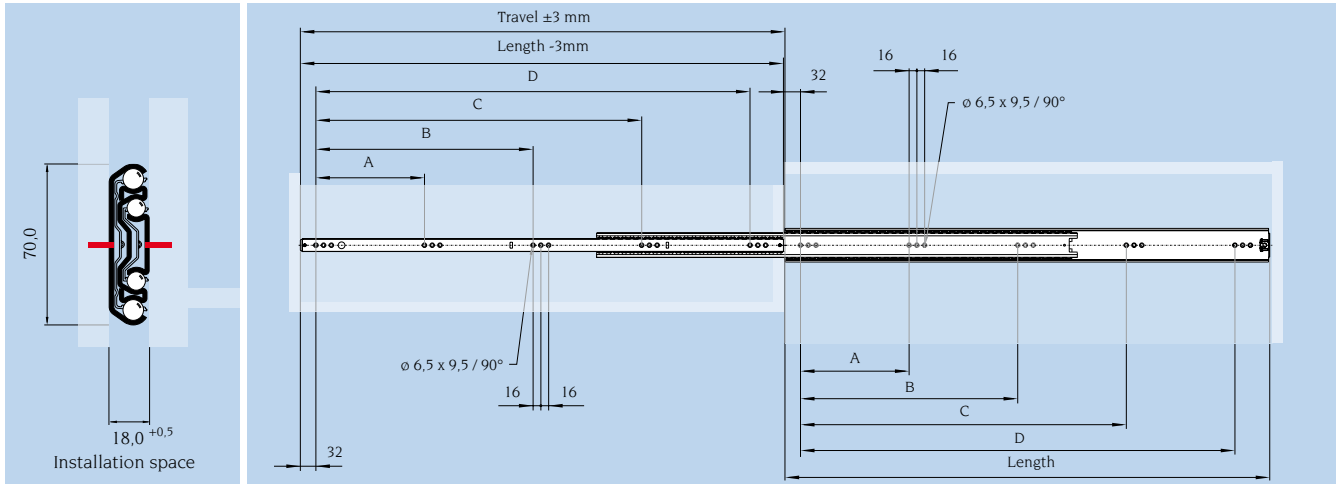

Fixing with M5 countersunk screws (screw head height 2,5 mm) or Euro screws (countersunk head height 1,5 mm)

Article No.	Length mm	Travel mm	Load capacity per pair (kg)		Load capacity per pair (kg) at 100.000 cycles	A mm	B mm	C mm	D mm	Weight kg / pair
			at 10.000 cycles	at 100.000 cycles						
070.11800	400	400	180	105	30	-	-	288	3,10	
070.11801	450	450	190	115	30	-	-	160 320	3,45	
070.11802	500	500	195	130	30	-	-	192 384	3,83	
070.11803	550	550	200	130	30	-	-	224 448	4,22	
070.11804	600	600	195	130	30	-	-	224 448	4,63	
070.11806	700	700	175	130	30	-	192	384 576	5,40	
070.11808	800	800	145	120	30	-	224	448 672	6,20	
070.11814	1100	1100	105	90	20	224	448	672 896	8,55	


## Materials and finishes:

- Slide rails: zinc electroplated and blue passivated steel
- Ball cages: pre-zincated steel
- Balls: hardened carbon steel


## Temperature range:

- Working temperature +10°C to +40°C
- Storage and transport temperature -20°C up to max. +80°C

The hold-in detent  
fixes the slide  
in closed position.

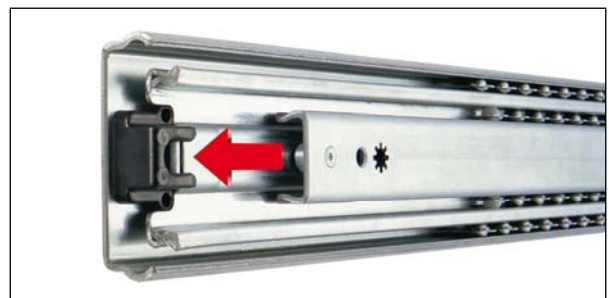


Applicable for  
horizontal  
installation.

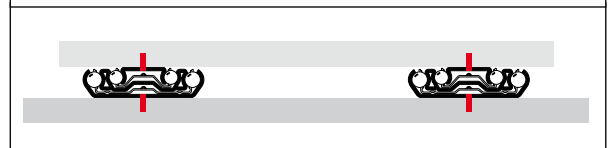

# Full extension Series 070

- Load capacity up to 200 kg
- Support bracket
- Hold-in detent

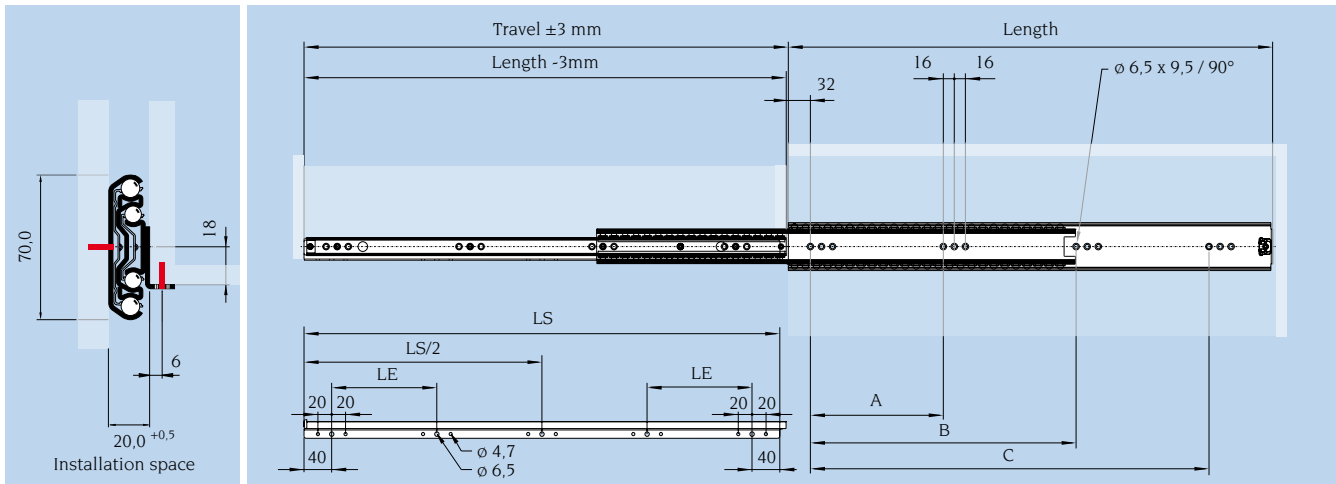

Fixing with M5 countersunk screws (screw head height 2,5 mm) or Euro screws (countersunk head height 1,5 mm)

Article No.	Length mm	Travel mm	Load capacity per pair (kg)		A mm	B mm	C mm	LS mm	LE mm	Weight kg / pair
			at 10.000 cycles	at 100.000 cycles						
070.11900	400	400	180	105	-	-	288	400	80	3,54
070.11901	450	450	190	115	-	160	320	448	92	3,98
070.11902	500	500	195	130	-	192	384	496	104	4,45
070.11903	550	550	200	130	-	224	448	544	116	4,89
070.11904	600	600	195	130	-	224	448	576	124	5,34
070.11906	700	700	175	130	192	384	576	688	152	6,22
070.11908	800	800	145	120	224	448	672	800	180	7,16

## Materials and finishes:

- Slide rails: zinc electroplated and blue passivated steel
- Ball cages: pre-zincated steel
- Balls: hardened carbon steel

## Temperature range:

- Working temperature +10°C to +40°C
- Storage and transport temperature -20°C up to max. +80°C

The hold-in detent  
fixes the slide  
in closed position.

