

MULTIFOLD Taschenfilter TC/TCQ 60

Description

- MULTIFOLD Pocket Filter with single inserted bags with throat-shaped spacers
- spacers and outer contours running conical over the bag length
- filter media from progressive synthetic nonwoven made of electrical uncharged, organic synthetic microfibres (PES)
- frame designs of galvanized steel sheet frame (TCQ-) or reinforced (TC-) steel sheet frame as well as black (TCKUS-) or reinforced blue (TCKU-) plastic frame, frame depth 20 or 25 mm



Types

Article	Size (WxHxD)	Filter area	Range of nominal airflow (100-125%)
TC60/60/6/8	592x892x600 mm	7,4 m ²	5000-6300 m ³ /h
TC60/60/6	592x592x600 mm	4,9 m ²	3400-4300 m ³ /h
TC60/60/5	490x592x600 mm	4,1 m ²	2800-3500 m ³ /h
TC60/60/3	287x592x600 mm	2,4 m ²	1700-2100 m ³ /h
TC60/60/3A	287x287x600 mm	1,3 m ²	850-1100 m ³ /h


Different pocket lengths, -numbers and special sizes available.

Technical Data

Filter class:	DIN EN 779	M5
Filter group:	DIN ISO 16890	ISO ePM10 50%
Pressure drop at 100% nominal airflow initial:	Pa	50
final (recommended):	Pa	300
Number of layers:	-	2
Max. operation temperature:	°C	100
Max. operation moisture (rel. humidity):	%	100
Classification of inflammability:	DIN EN 13501	E

Technical data are being compiled to the best of our knowledge. Responsibility cannot be accepted. We reserve the right of technical modifications. Version 1/21

Pressure Drop

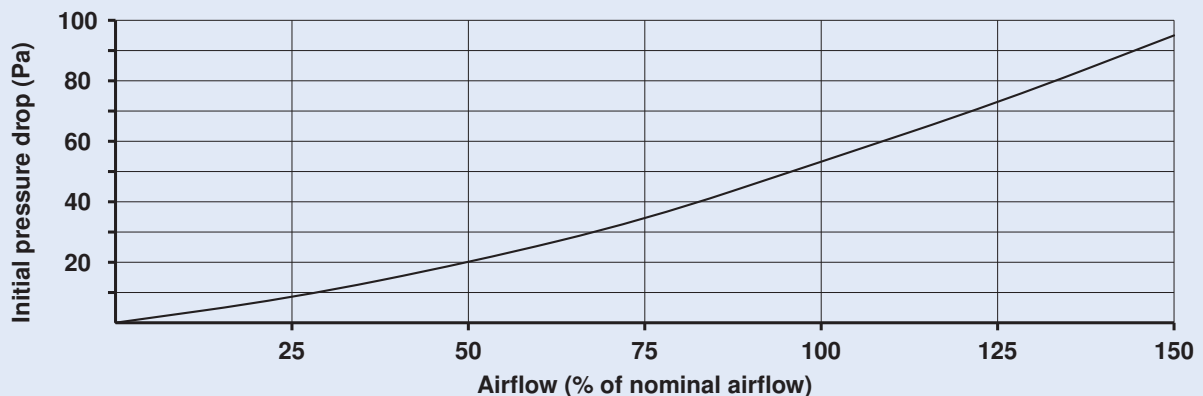

Ihr Partner für Filtertechnik

