


HINGE DRAWN BARREL UP

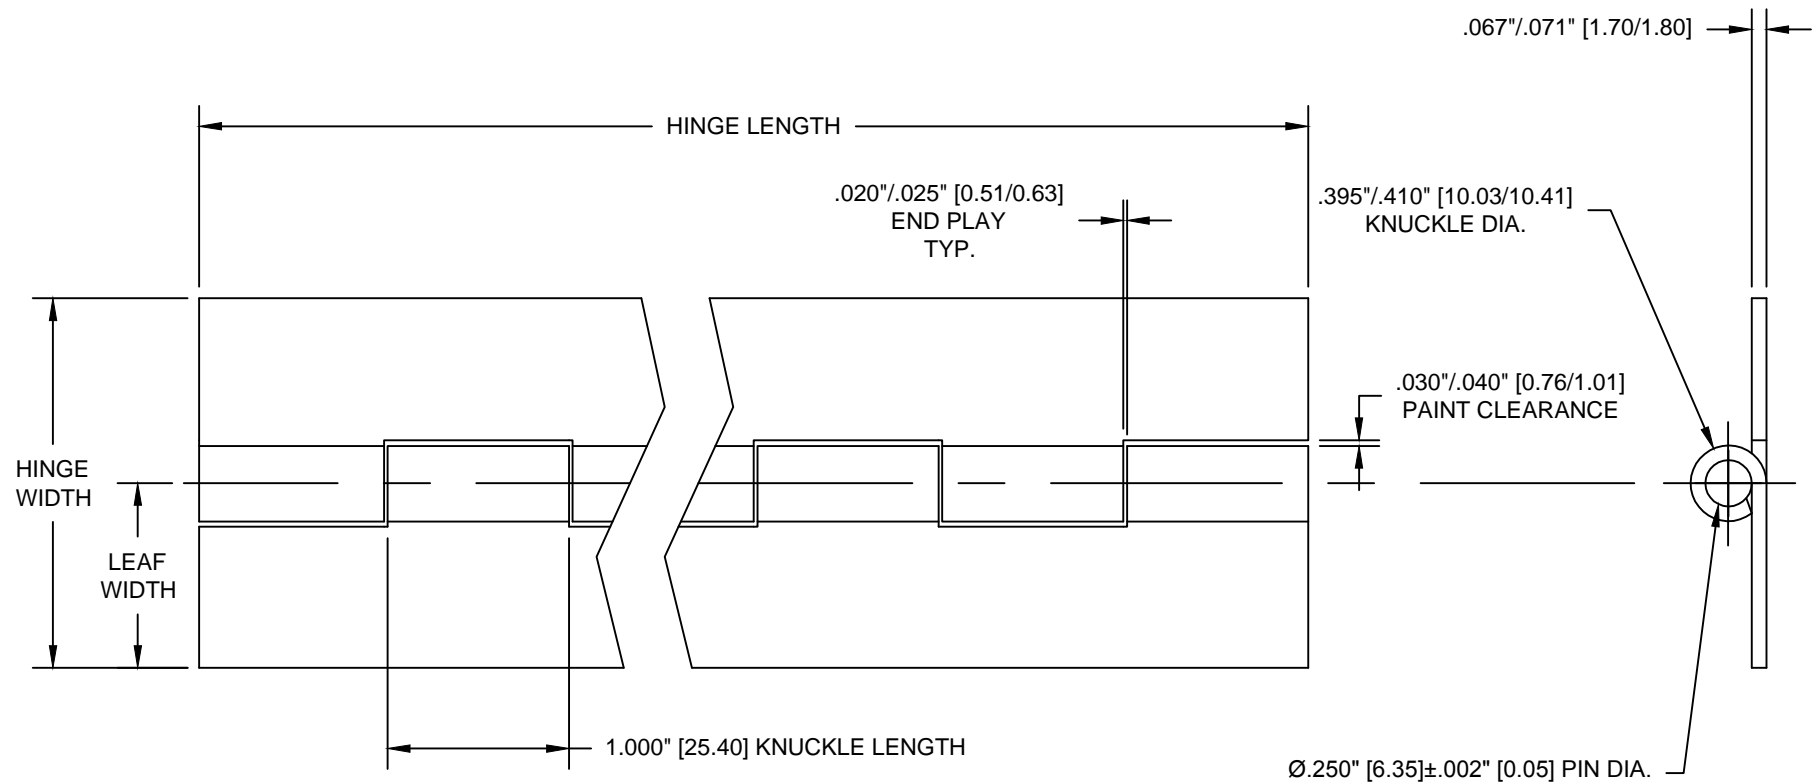

NOTES:

- 1] S&S Hinge series # 1300
- 2] Gauge/thickness - .067\"/>

SERIES #:	HINGE WIDTH:	LEAF WIDTH:
1303	1.50" [38.10]	.750" [19.05]
1305	2.00" [50.80]	1.00" [25.40]
1307	2.50" [63.50]	1.250" [31.75]
1309	3.00" [76.20]	1.500" [38.10]
1311	3.50" [88.90]	1.750" [44.45]
1313	4.00" [101.60]	2.000" [50.80]



Continuous Hinge, Quality and Service Worldwide | Est. 1932

210 COVINGTON DRIVE
 BLOOMINGDALE, IL. 60108
 1-800-332-1227 TEL: (630) 582-9500 FAX: (630) 582-8844
www.SandSHinge.com


DRAWN BY: ENGINEERING DEPT.

DATE: CURRENT REVISION SCALE: N-T-S

PART No: 1300 SERIES

DIMENSIONS IN: INCHES <input checked="" type="checkbox"/> MILLIMETERS <input checked="" type="checkbox"/>			
S&S HINGE CO. STANDARD TOLERANCES			
DEC	INCH	MM	THIRD ANGLE
.XX	± .030	± 0.750	
.XXX	± .015	± 0.380	
HOLE DIA	± .005	± 0.127	
ANGLE	± 3°		

THIS PRINT AND/OR SPECIFICATION ARE EXCLUSIVE PROPERTY OF S&S HINGE CO. AND ARE NOT TO BE REPRODUCED, COPIED, USED OR DISCLOSED TO ANYONE WITHOUT PERMISSION.



CUSTOMER:

REV	DATE:	DESCRIPTION