Micrometer Adjustable Torque Wrench Series QL-N: 0.4 - 25 N·m

Fig.: QL2N

- Accuracy ± 3% FSD.
- Reversible ratchet head with 24 teeth and 15° operating range.
- Improved adjusting and lock mechanism.
- New designed ergonomic resin handle.
- Torque setting is easy to adjust by knob and scale.
- Compliant with calibration procederes of ISO 6789, type II, class A.
- Traceable calibration certificate (JCSS) included.

Clicker Wrench with Reversible Ratchet

Basic click type torque wrench for various tightening applications. Its 24 teeth ratchet with 15 degree operating range allows usage in space-limited working conditions.

A clear "click" sound by internal toggle mechanism signals tightening completion upon reaching the set torque. Torque setting is easy to adjust by knob and scale.

The lock-structure has been newly-developed. It assures operation in secure, and set-torque remains solidly.

The ergonomic resin handle not only covers the large and easy to read scale but it also reduces operators fatigue.

Via optional color caps differently set wrenches can be identified at a glance.

Large easy-to-read scale for as simple as precise torque adjustment.



newly developed lock mechanism.

Optional color caps (green, blue, red) available separately.

Optionen

- Available with english scale (lbf·in) on request.
- Other models and alternatives on request, e.g.:

Series CL-N for interchangeable heads.

PokaYoke version MS/LS with limit switch und curly cable to connect to PLC or the like.

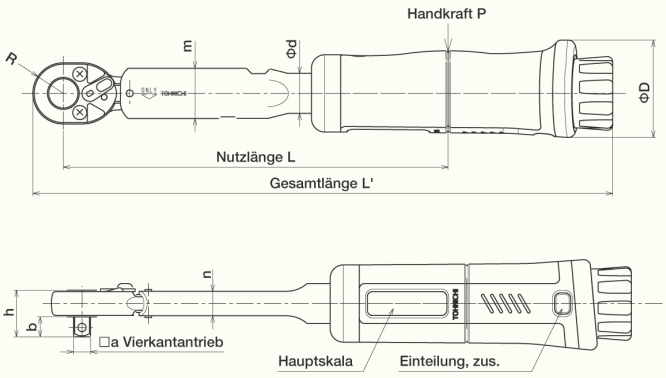

QL-N

Model	Item No.	Torque Range *	Graduation	Sq. Drv.	Weight	Dimensions mm				
		N·m	N·m	Inch	kg	L	L'	b	h	B
QL 2 N	T212001	0.4 - 2	0.02	1/4	0.27	121	193.5	7.5	17.5	23
QL 5 N	T212004	1 - 5	0.05	1/4	0.27	121	193.5	7.5	17.5	23
QL 10 N	T212007	2 - 10	0.1	1/4	0.29	145	218.5	7.5	17.5	23
QL 15 N	T212010	3 - 15	0.1	1/4	0.29	145	218.5	7.5	17.5	23
QL 25 N5-1/4	T212013	5 - 25	0.2	1/4	0.33	162	237.0	7.5	18.5	26
QL 25 N5	T212016	5 - 25	0.2	3/8	0.33	162	237.0	11	22.0	26

** The requirements and verification procederes of the EN ISO 6789 are valid for a measuring range from 20% to 100% of rated capacity (maximum value). Recommended is a general usage in mid-range. If you worked near rated capacity regularly, a larger model should be considered.*

More information available 24 hrs a day on our website.

Mail: info@zemo-tools.de · Fax: +49 (0)40 789181 12 · Tel: +49 (0)40 789181 02