

ESPECIFICACIONES TÉCNICAS:

Estructura

Marco de la brida poliamida PA66 GF25 V-0
 Placa de elastómeros el EPDM cumple las siguientes normas de automoción: VW 2.8.1 G50, DBL 5556.10; DBL 5556.20; DBL 5556.21; resistente al ozono según DIN 53509, nivel 0 (el mejor nivel)

Junta TPE TPV

Propiedades

Técnicas tecnología de conexión sin medios auxiliares para el cableado de máquinas e instalaciones

Aplicación se pueden insertar cables y líneas, mangueras, líneas neumáticas e hidráulicas

Rango de temperatura -30 °C/+100 °C

Tipo de protección IP66

Norma de ensayo UL 514B

Documento UL/CSA E140310

Medidas exteriores L = 147,5 mm, L1 = 59,5 mm, H = 25 mm, H1 = 8,2 mm

TECHNICAL DATA:

Configuration

Flange Polyamide PA66 GF25 V-0
 Elastomeric plate EPDM according to automotive standards: VW 2.8.1 G50, DBL 5556.10; DBL 5556.20; DBL 5556.21; ozone resistant according to DIN 53509, level 0 (best level)

Sealing TPE TPV

Properties

Technology tool-free connecting technology for cabling of machines and equipment

Application for introduction of cables, tubes, pneumatic and hydraulic pipes


Temperature range -30 °C / +100 °C

Protection grade IP66

Test standard UL 514B

UL / CSA-File E140310

Overall dimension L = 147,5 mm, L1 = 59,5 mm, H = 25 mm, H1 = 8,2 mm

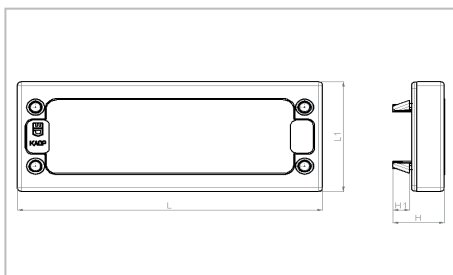

Características

Characteristics

Denominación Description	Número de orificios en la placa de paso de cables adecuado al diámetro de línea Number of entries on the cable entry plate suitable for cable diameter											 negro black  N.º artículo/Part. No.	
	1,5	2,5	3,0	3,0	4,1	5,0	8,0	8,0	9,0	9,6	14,0		
	2,6	5,0	5,5	6,5	8,1	9,2	12,0	12,5	14,0	15,9	20,0		
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm		
KADP 24/11				4		4					3	1	F305-9240-00
KADP 24/12							12					1	F305-9240-01
KADP 24/13			2		6				4		1	1	F305-9240-02
KADP 24/14				6		4				4		1	F305-9240-03
KADP 24/17							17					1	F305-9240-04
KADP 24/17-1				11	1				5			1	F305-9240-05
KADP 24/22				16		4		2				1	F305-9240-06
KADP 24/23					23							1	F305-9240-07
KADP 24/29				29								1	F305-9240-08
KADP 24/BLI												1	F305-9240-99

Dimensiones del orificio/Hole dimensions

